

# CRUMA HZ-1

The new **Cruma HZ-1** is our little horizontal laminar flow cabinet Class ISO 5 (former class 100) ideal for works that should ensure the protection of the products against external and cross-contamination.

The unique mounting system of the sidewalls, positioned inside the perimeter of the filter, prevents contaminants from entering into the work area through the same filter frame thanks to the Venturi-effect.


The air passes through a polyurethane fiber G-4 prefilter and it is pushed by the fan to the retention plenum, then goes through the absolute HEPA filter and reaches the working chamber. The airflow leaving the HEPA filter placed in front of the operator, at a constant speed, creates an ISO 5 sterile area removing any possible contaminants from the product you are working with.



## USES

- ✓ Parenteral bags reconstruction
- ✓ Assisted reproductive technologies
- ✓ Micropropagation
- ✓ Plant Cell Cultures
- ✓ Food and water quality control
- ✓ Dust Protection in optics and electronics industry

## NEW TECHNICAL FEATURES

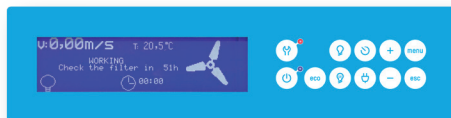

### More info on the new LCD screen


- ✓ Large-format display 127x34 mm
- ✓ Type of filter installed, working hours, expiry date and next revision
- ✓ Countdown Timer
- ✓ Clock and calendar

### New features and components

- ✓ Initial cycle flow adequacy and final cycle purge
- ✓ Fault LED indicator
- ✓ Air Flow Control by Microprocessor
- ✓ HEPA filters with electronic chip
- ✓ LED Lighting

### New alarms and warnings

- ✓ Next validation warnings
- ✓ Few hours of filter life warning
- ✓ Countdown timer warning
- ✓ Expired filter alarm (by hours)
- ✓ Expired filter alarm (by date)
- ✓ Equipment without filter alarm

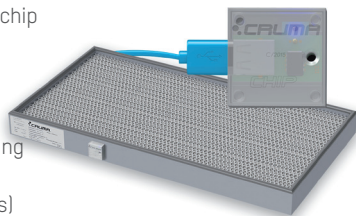

## MAIN FEATURES

- ✓ **Manufacture:** The external surfaces are made of cold-rolled steel with a grey/ochre coating, stove-enamelled, and features resistance against chemical compounds used for sterilisation. On the other hand, the working surface is made of AISI 304 2B stainless steel.
- ✓ **HEPA absolute filter:** With flow equaliser, efficiency higher than 99.995 % on particles of 0.3 microns.
- ✓ **Fan:** Centrifugal motor with double suction, suitable to provide laminar flow in the working area, especially in order to cope with the saturation of the filters.
- ✓ **Control panel:** Soft-touch keyboard with switch for LED lamps, UV, air maintenance system (electronically self-regulating air speed), output speed display and control buttons for speed adjustment.
- ✓ **Lighting:** It has LED lamps with prismatic diffuser screens located in the central part, which improves light distribution over the work area.

## TECHNICAL FEATURES

Number of filters		1
Number of IP44 fans		2
Average face velocity		0.45 m/s
Total electrical power consumption		414 W
Voltage-Frequency		110-220 V / 50-60 Hz
LED light intensity		2 x 16W/1500 Lm
Noise level		45 dB
<b>Packaging:</b> 100% recycled wooden box with international phytosanitary certificate	Volume	0.54 m <sup>3</sup>
	Weight	102 Kg

## It is not a typographical error, 10 year warranty

Because we are convinced of the quality of our products.



\*More information  
[www.cruma.es](http://www.cruma.es)

## Well done, well shipped. Our responsible packaging

Wood box 100% recyclable with international phytosanitary certificate.





## Do you need help or technical assistance?

Contact your distributor or call us if you have any questions or need technical support, spare parts, maintenance service...

**+34 93 370 61 62**

# CRUMA<sup>H2-1</sup>

## SIZES (mm)

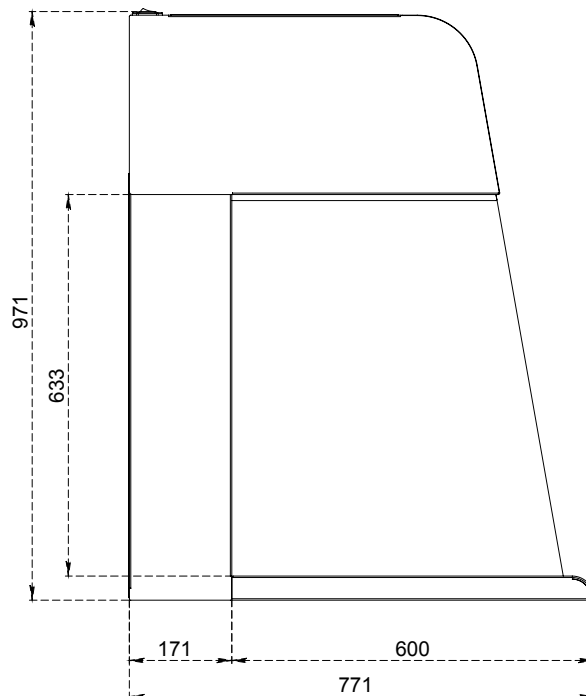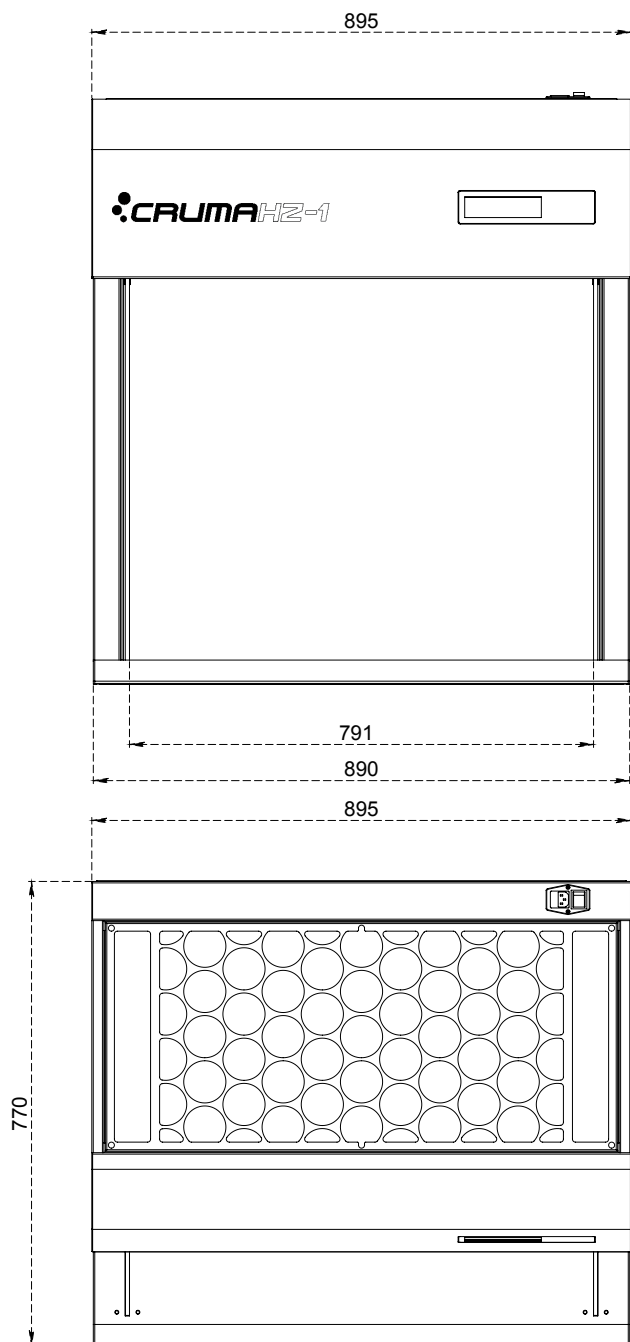

### SIZES (mm)

Exterior			Interior		
Width	Depth	Height	Width	Depth	Height
895	770	977	769	600	633

### STRUCTURE

Metallic parts	In 1.2 mm galvanized steel coated with anti-corrosion thermosetting polymer resin hardened at 200 °C
Side Panels	In transparent polymethyl methacrylate (PMMA), 8 mm thick. Light transmission 93%.

HORIZONTAL LAMINAR FLOW CABINET TO PROTECT THE SAMPLE

# CRUMA HZ-1



## STANDARD EQUIPMENT

Electronic circuit with large format LCD display	Security levels: User (level 1) and Advanced (level 2)
Electronic control device for filter	The filters incorporate a chip with USB connection that identifies the type of installed, expiry date and the serial number.
Illumination (3)	LED panel (3u) high light intensity and low power consumption - 15 W / 1200 lm
Electronic chronometer	For the supervision and control of work carried out in the fume hood
Clock and calendar	Display of date and time
Working surface	Working surface made in inox steel AISI 304 2B
G4 prefilter	G4 class pre-filtering blanket of synthetic biofibres (according to EN-779) for the retention of atmospheric dust
Warranty	10 years

## OPTIONAL EQUIPMENT

Tubular steel stand for CRUMA HZ-1  
Portable UV light (2 x 15 Watt UV lamps)

## COMPLIANCE TO STANDARDS

Filters	UNE EN ISO 16890:2017 EN-1822:2010 (HEPA & ULPA Filters)
Quality	UNE EN ISO 9001:2015

We recognise our responsibility and dependence towards a healthy environment and, therefore, we destinate more than 7% of our annual budget in innovating and developing new products for the lab operator

our 7% engagement

#### PLUG&PLAY RANGE



G-1



G-2



G-3



G-4



G-5

#### CLASSIC RANGE




670




670



990



1010



1200




1200XL



ECO

#### VENTED STORAGE CUPBOARDS



2010



ECO

#### POWDER CABINETS



H+

#### POWDER WEIGHING CABINETS



P-1



P-2

#### PRECISION WEIGHING CABINET



W-2

#### LAMINAR FLOW CABINETS



670FL



870FL




FL-1



FL-2

#### PCR CABINETS




PCR



PCR-V



H2-1



H2-2



H2-3




H2-4


#### BIOSAFETY CABINETS



BIO+



SOFEB



CYTO-2.3

#### CO<sub>2</sub> INCUBATOR



INCUBATOR